

PRIMA CON OCS


Optic Control System

Control mould inserts, electrodes, surfaces and milling tools. Shortly: everything you manufacture and use daily.
Straightforward and secure!



TECHNICAL DETAILS OCS 75


- USB 3.0 Full-HD-Camera up to 1920 x 1080 pixels, max. 60 pics/sec.
- Continuously adjustable zoom lens:
6-fold enlargement: depth of field 75 mm, visual field 70,0 x 50,0 mm,
60-fold enlargement: depth of field 5 mm, visual field 7,0 x 5,0 mm
- OCS software basic module, suitable for picture documentation
- LED-circle light: continuously adjustable up to 17.000 Lux
- Robust aluminum tripod with a Z-pillar and a 300 mm coarse adjustment

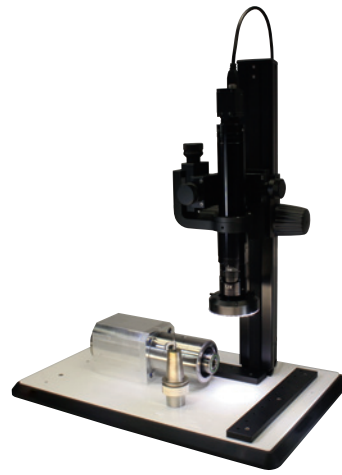

ALTERNATIVE: OCS 500


- USB 3.0 Full-HD-Camera up to 1920 x 1080 pixels, max. 60 pics/sec.
- 12x locking zoom
- 42 to 500-fold enlargement
- continuously adjustable LED-circle light
- Robust aluminum tripod with a Z-pillar and a 500 mm coarse adjustment
- OCS software basic module, suitable for picture documentation
- OCS measurement analysis

ADDITIONAL MODULES

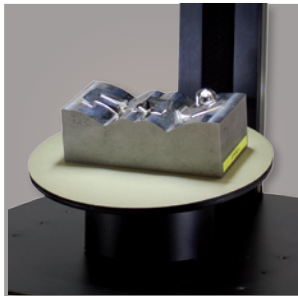


ADDITIONAL MODUL 1

Swivel table

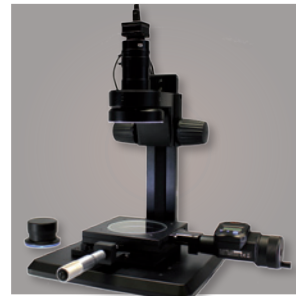


ADDITIONAL MODUL 2

High precision cross table

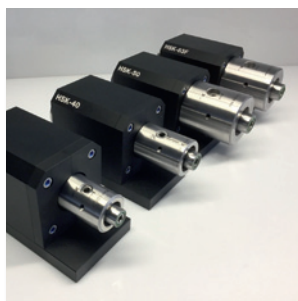

ADDITIONAL MODUL 3

High precision spindle available as HSK32E, HSK40E, HSK50, HSK63F, HSK63E

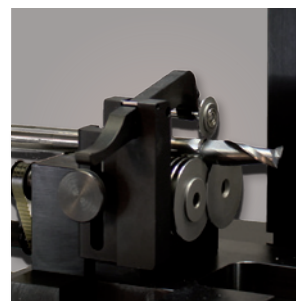

ADDITIONAL MODUL 4

High precision concentricity picture

PRIMACON Service-Hotline

Our specialists help you find solutions and fix problems before they arise. Please Contact us!

 +49 (0)8803 6321 - 30

PRIMACON GmbH

Alte Kohlenwäsche 13
82380 Peißenberg, Germany

Phone: +49 (0)8803 6321-0
Fax: +49 (0)8803 6321-13

info@primacon.de
www.primacon.com